




KC HiLITES

FLEX LED Light Bars

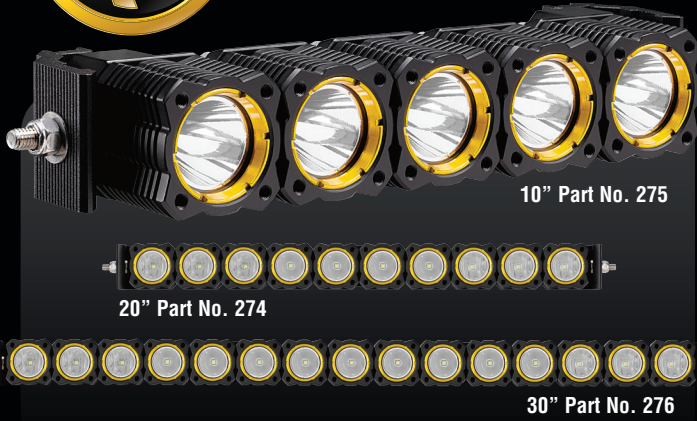


FLEX LED LIGHT BARS

FEATURES

Four Models Available:

- **10" Spot Beam – #273**
Rated at: 50-Watt; 4,875 Lumens;
1,200 LUX @ 10 Meters; 120,000 Candela
- **10" Combo Spread / Spot Beam – #275**
Rated at: 50-Watt; 4,875 Lumens;
1,150 LUX @ 10 Meters; 115,000 Candela
- **20" Combo Spread / Spot Beam – #274**
Rated at: 100-Watt; 9,750 Lumens;
1,900 LUX @ 10 Meters; 190,000 Candela
- **30" Combo Spread / Spot Beam – #276**
Rated at: 150-Watt; 14,625 Lumens;
2,700 LUX @ 10 Meters; 270,000 Candela
- Cree XM-L2 U2 LEDs with a 50,000 Hour Life
- 5,700K Color Temperature
- Precision Reflector Optics
- IP68 Rated Die-Cast Aluminum Housings
- Operates on 9 to 18 Volts
- Protected Against EMI Interference
- All Include Wiring Harness with Waterproof Connectors

PHOTOMETRICS

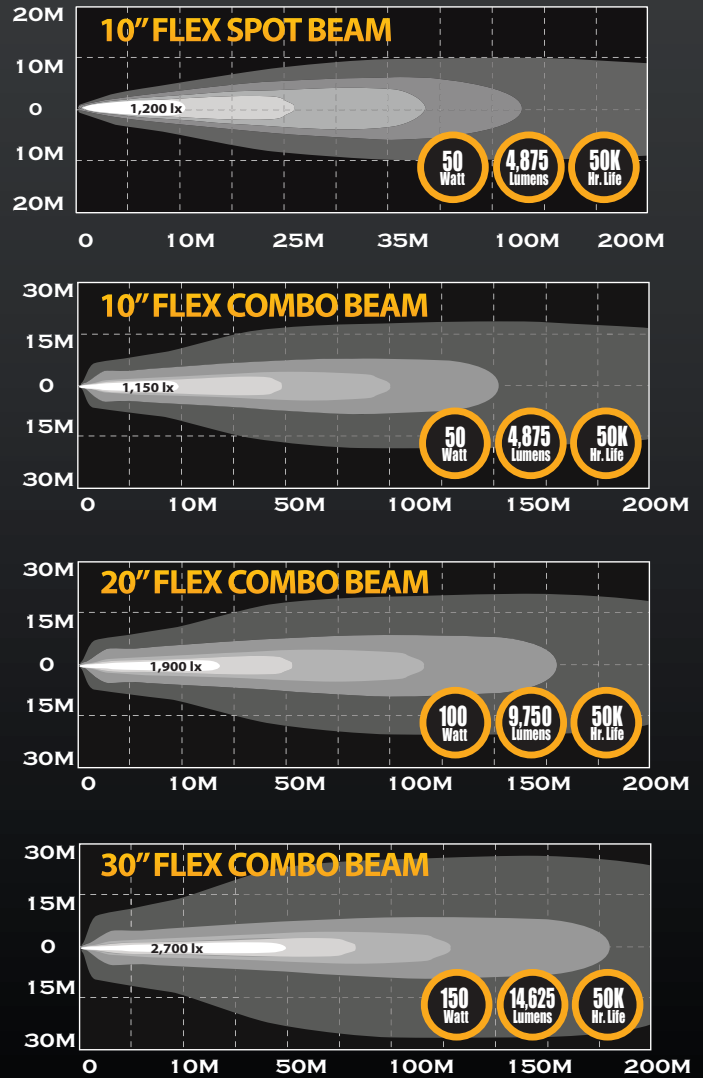

FLEX LED LIGHT BAR DIMENSIONS



KC FLEX LED LIGHT BARS

Part No.	Model / Description	Beam Pattern	No. of LEDs	Watts	Amps	Volts	Lumens	Dimensions		
								A	B	C
273	10" Flex Light Bar	Spot	5	50	5	9-18	4,875	3.25"	2.0"	11.375"
275	10" Flex Light Bar	Combo Spread / Spot	5	50	5	9-18	4,875	3.25"	2.0"	11.375"
274	20" Flex Light Bar	Combo Spread / Spot	10	100	10	9-18	9,750	3.25"	2.0"	21.375"
276	30" Flex Light Bar	Combo Spread / Spot	15	150	15	9-18	14,625	3.25"	2.0"	31.375"